

# LED Post light



## ● 产品特点 Product Features

1. 半圆形光模块设计，防护等级IP65。Optical module adopt semi-circle design, IP65 protection.
2. 散热器一体式设计确保具有优良的热辐射性能。Well designed heatsink ensure excellent heat-exchange performance.
3. 恒流电源具备IP67防护、4 kv防雷、过温度保护,过电压保护。Constant current driver features IP67 protection, 4KV lightning proof, over temperature protection, over voltage protection.
4. 不含卤素、铅及汞等有害物质，完全符合欧盟ROHS规范。Free of halogen, lead and mercury, fully ROHS compliant.

## ● 应用场所 Applications

适用于公园、广场、住宅区等户外活动场所。  
Park, Square, Residential community and etc.

## ● 规格 Specification


型号/Model	XLD-LED153-XX40	XLD-LED153-XX60
功率/Power	40W	60W
LED型号 LED Model	LG 5630	
工作电压 Working voltage	AC 85~305V 50/60Hz	
光效 Luminous efficacy	≥95 lm/w	
使用寿命 Working life	50,000h	
电源效率 Power efficiency	≥88%	≥90%
功率因数 Power factor	>0.95	
防护等级 IP rating	IP65	
工作环境温度 Working temperature	-20~50°C	
产品重量 Product weight	4.3/6.5KG	

\*产品标准色温为4000K，显指为Ra≥70。


Standard color temperature 4000K, Ra≥70

\*以上参数为参考值,部分参数实际存在的误差。

Above parameters for reference only, tolerance exist for partial parameters

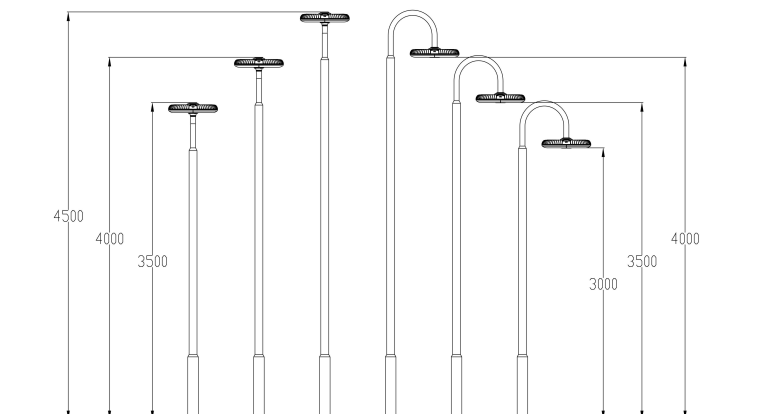

## ● 配光曲线 Photometric data

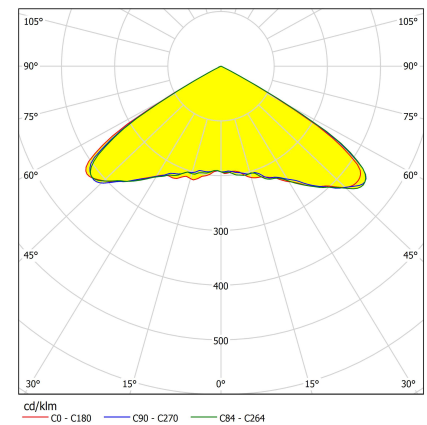

## ● 结构尺寸 Dimensions(mm)

